


DETAILS:

Please ensure that the plastic sleeving which is fitted to the BNC aerial connector remains in place when fitting the connector to the **RX_nC** unit. This is necessary for continued CE compliance.

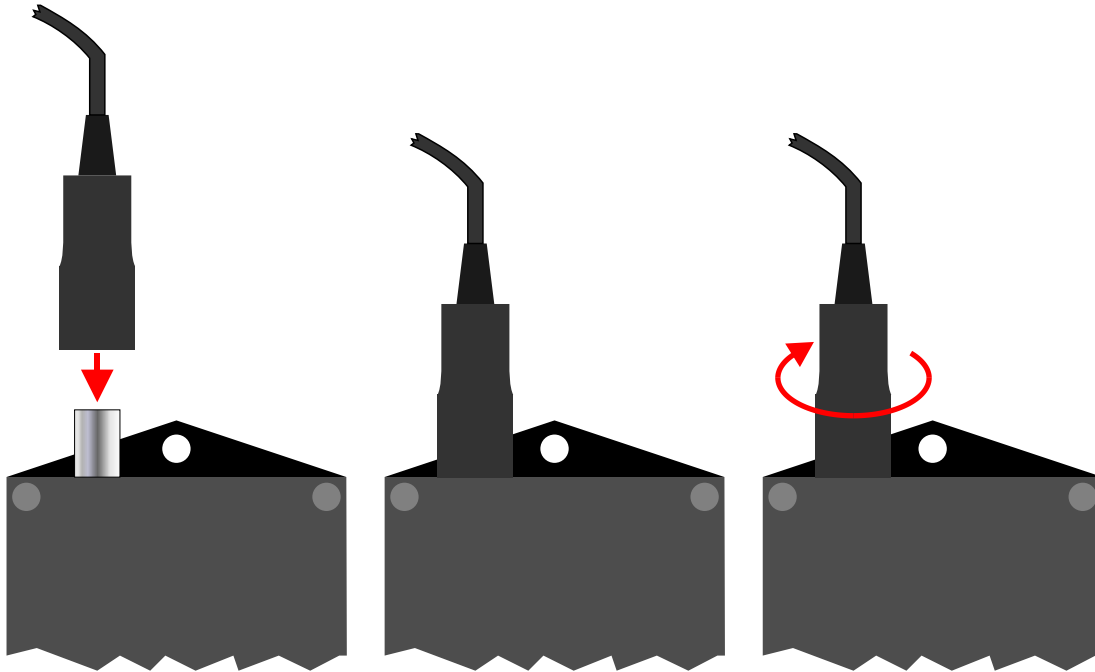

1. Push aerial connector onto BNC socket

2. Ensure connector is fully home on socket

3. Turn 1/4 turn clockwise to lock connector onto socket.

DISCONNECTION IS A REVERSAL OF CONNECTION

COLTER GROUP
COLTER PRODUCTS LTD

UNIT 7, ZONE C, CHELMSFORD ROAD INDUSTRIAL ESTATE DUNMOW, ESSEX, CM6 1HD

Tel: +44 (0) 1371 876887

Fax: +44 (0) 1371 875638

e-mail: sales@coltergroup.co.uk

web: www.coltergroup.co.uk

© Copyright 2002

