

TagMaster AB

CardTape™ S1954

Mounting tape for card and heavy duty tags

CardTape S1954/00 is a tape to be used when mounting tags from the TagMaster product range in car windcreens and on most other hard and flat surfaces. Examples of these are painted metal and plastic materials.


Both heavy duty tags (S1450 ScriptTag HD and S1455 MarkTag HD) and card tags (S1251 ScriptTag and S1255 MarkTag) can be mounted using the CardTape.

It is very difficult to remove the tag from the car window when this tape is used, which is desirable when there is a risk of tag theft.

How to mount the tag using CardTape

1. Clean the front of the tag using isopropanol or similar cleaning fluid.
2. Remove the white paper sheet of the CardTape and apply the tape to the front of the tag. Do not touch the sticky surface with your fingers.
3. Press on the tape to receive better adherence. Preferably with a hard roller of some kind.
4. Clean the inside of the car window where the tag is to be placed. For best performance, use isopropanol.
5. Remove the red plastic protection sheet from the CardTape.
6. Place the tag in the car window and press firmly on the tag.
7. Maximum adherence is reached after 72 hours. This time can be decreased if the material is heated up to approximately 70° for 1 hour.

CardTape mechanical data

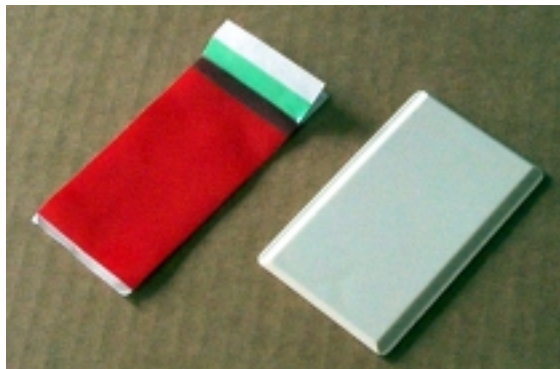

Weight	4.6 grams
Size	83 * 45 mm
Applying temperature, ideal	21° - 38°C
Applying temperature, lowest	10°C
Tape colour	Transparent

TagMaster AB

Electrum 410 Tel +46 - (0)8 632 1950
S-164 40 KISTA Fax +46 - (0)8 750 5362
Sweden
email: confident@tagmaster.se
<http://www.tagmaster.com>

Options

The ordering code of the product in this data sheet is "CardTape S1954/00".

This document

Specifications are subject to change without prior notice.

Representative:

ds1954aa 9909



CONFIDENT